


# Conditional Access Module

The Easiest Solution for Digital TV's Experience

**NEOTION**  
Innovation Attitude

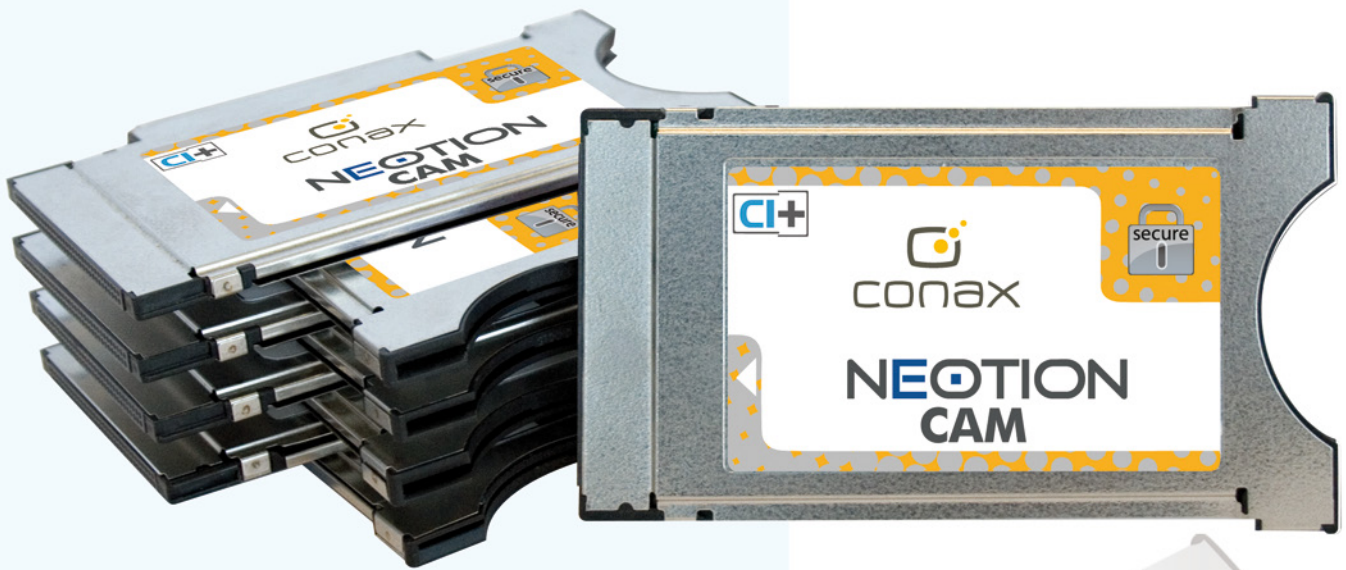

**Embedded CAS :**



**Chipset Pairing - CI Plus**

## CAM for DVB-CI and CI Plus Digital TV & Set-Top Box !

**P**owered by NEOTION in-house silicon technology, the **NEOTION Plug-n-Play CAM** enables Digital TV sets (iDTV) and Set-Top Boxes to decode TV programs scrambled with Conditional Access System **CONAX™** Chipset Pairing 5.0 (compatible with lower version).

**I**nserted in the Common Interface (DVB-CI or CI Plus) slot, **NEOTION CAM** allows customers to simply benefit from the booming emergence of MPEG-4 / MPEG-2 and HDTV channels scrambled with **CONAX™** on their digital receivers.




**NEOTION SA** – France  
Tel: +33 (0)4 42 98 07 70  
e-mail: [business@neotion.com](mailto:business@neotion.com)  
[www.neotion.com](http://www.neotion.com)

**NEOTION CONAX CAM**



# CONAX CAM

Chipset Pairing - CI Plus



## NEOTON CAM

Plug-n-Play TV, DVB-CI & CI Plus CAM:

Secured, small, easy to use, low power consumption.



## CONAX CAM MAIN FEATURES

### Stream Type supported

- MPEG-2, MPEG-4, SD and HD
- All Audio Type (MPEG2, AAC, HE AAC, Dolby, etc)
- Private Data
- Teletext

### Interfacing

- Plug-and-Play & User Friendly
- DVB-CI high level MMI compliant / CI Plus browser
- Languages: English (up to 18 languages)

### Standards

- DVB Common Interface standard and PCMCIA ISO/IEC EN50221 compliant
- CI Plus Specification v1.2 compliant
- Smart Card: full ISO 7816-3 (T=0) compliant
- RoHS compliant - directive 2002/95/EC

### OTA

- Upgrade from MPEG transport stream over the air
- DVB SSU compliant

### Memory

- On chip eDRAM: 16Mbits
- Off chip SDRAM: 128Mbits
- Off chip Serial Flash: 32Mbits

### Security

- CONAX™ Conditional Access System embedded (for MPEG-2 or MPEG-4, SD & HD Pay TV services)
- Unique and protected Authentication ID
- Hardware crypto accelerators
- Secure Chipset for application such as pairing (anti card sharing / anti control word sharing)
- On chip OTP
- Copy Protection CI Plus Standard: both AES and DES encryption supported

### Processing

- ARM7™ @ 126MHz
- 8K I-cache and 8K D-cache
- 8 DVB-CSA descrambler up to 64 PID
- Section Filters - Transport packet filters up to 32 PID

### Size, Weight & Power supply

- PCMCIA Type II
- 46g
- 5 volts, from any DVB-CI / CI Plus host

